WIRING INSTRUCTIONS

TITLE


12 VOLT PISTOL DRILLS

BULLETIN 58-01-0130

MILWAUKEE ELECTRIC TOOL CORP.

13135 WEST LISBON RD. BROOKFIELD, WIS

Date Feb. '70

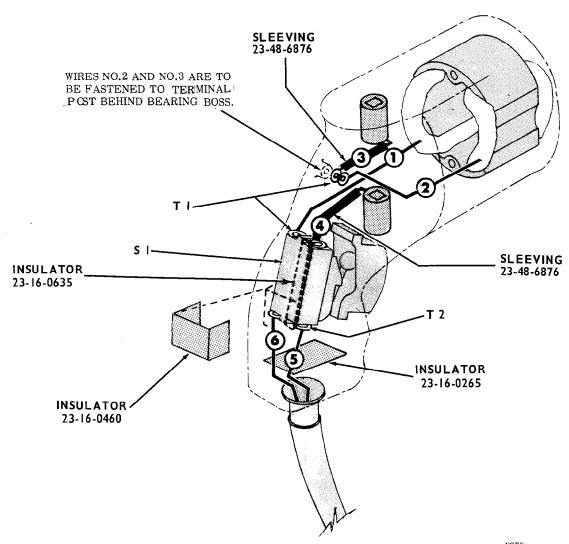

USE LOCK WASHERS UNDER ALL SWITCH TERMINALS.

WHERE TERMINAL AND CONNECTOR COMBINATIONS ARE SPECIFIED, SEE ELECTRICAL PARTS CHART FOR PART NO. AND QUANTITY AND DRAWING FOR ACTUAL HOOK-UP

WIRING SPECIFICATIONS																						
Wire	Wire	C-	Lgth.	Terminal					Connector			Wire	Wire		Lgth.	Terminal				Connector		
Color	No.	Ga.	in.	T1	T2	T3	T4	Cı	C2	C3	C4	Color	No.	Ga.	in.	T1	T2	T3	T4	C1 C2	C3C4	
White	ı	Fld.	3	х																		
White	2	Fid.	2-1/2	Х																		-
Black	3	Brsh,	2-3/8	х							[
Black	4	Brsh.	2-3/8	х																		
Black	5	Cord	2		х																	
White	6	Cord	2		х				İ													

ALL LEADS MUST BE HELD TO ± 1/8"
ALL FIELD LEADS TO BE MEASURED FROM
AND PERPENDICULAR TO LAMINATIONS.
ALL LEAD LENGTHS ARE BEFORE STRIPPING.

Electrical Parts								
TERMINAL DESCRIPTION								
Code	Part No.	Qnty.						
TI	23-74-0330	4						
T2	23-74-0210	2						
CO	NNECTOR DESCRIPT	ION						
Code	Part No.	Qnty.						
	DESCRIPTION OF THE PROPERTY OF							
_	WITCH DESCRIPTION							
Code	Part No.	Qnty.						
S 1	23-66-0280	1						

Form OF-24