
WIRING INSTRUCTIONS

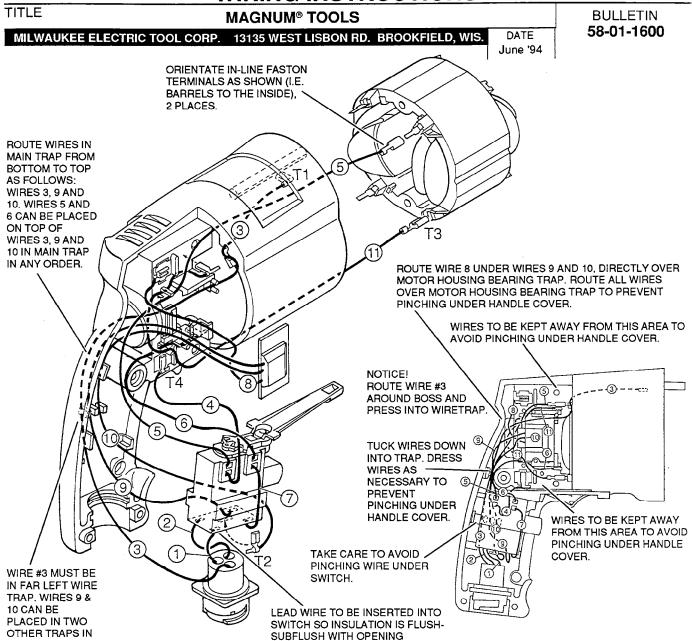

| | WIRING SPECIFICATIONS | | | | | | | |
|-------------|-----------------------|-----------------------|-------|-----------|---|--|--|--|
| Wire No. | Wire Color | Origin or Part No. | Gauge | Length | Terminals, Connectors and End Wire Preparation | | | |
| 1 | White | Pin Hsg. Assy. | 20 | | Component of pin housing assembly. | | | |
| 2 | White | Pin Hsg. Assy. | 20 | | Component of pin housing assembly. | | | |
| 3 | Green | Pin Hsg. Assy. | 20 | | Component of pin housing assembly / Strip 3/16" for T1. | | | |
| 4 | Blue | 23-94-6245 | 20 | 2-1/8" | Strip 3/16" for T4 / Strip 5/16" and tin. | | | |
| 5 | Blue | 23-94-6230 | 20 | 4-1/8" | Strip 3/16" for T3 / Strip 5/16" and tin. | | | |
| 6 | White | 23-94-6235 | 20 | 4-1/8" | Strip 3/16" for T4 / Strip 5/16" and tin. | | | |
| 7 | | Switch | | | Supplied with switch. | | | |
| 8 | Black | Module | 18 | 1-5/8" | Strip 3/16" for T4. | | | |
| 9 | Black | Module | 18 | 5-3/8" | Strip 5/16" and tin. | | | |
| 10 | Black | Module | 18 | 5-3/8" | Strip 3/16" for T2. | | | |
| 11 | White | 23-94-6240 | 20 | 3-3/8" | Strip 3/16" for T3 / Strip 3/16" for T4. | | | |
| | | | | | | | | |
| | | | BIHK | LEAD WIRE | F - BULLETIN 58-01-0003 | | | |

ANY ORDER.

NOTE: All leads must be held to ± 1/8". All lead lengths are before stripping.

| TERMINAL DESCRIPTION | | | | | | | | |
|-----------------------|------------|-------|--|--|--|--|--|--|
| Code | Part No. | Qnty. | | | | | | |
| T1 | 23-74-0615 | 1 | | | | | | |
| T2 | 23-74-0900 | 1 | | | | | | |
| ТЗ | 23-74-1090 | 2 | | | | | | |
| T4 | 23-74-1100 | 4 | | | | | | |
| CONNECTOR DESCRIPTION | | | | | | | | |
| | · · | | | | | | | |
| | | | | | | | | |