

WIRING INSTRUCTIONS

TITLE

D-HANDLE TOOLS

MILWAUKEE ELECTRIC TOOL CORP. 13135 WEST LISBON RD. BROOKFIELD, WIS.


DATE

May 2006


BULLETIN

58-01-0278

Orientate in-line fast on terminals T2 with barrels facing either in or out.

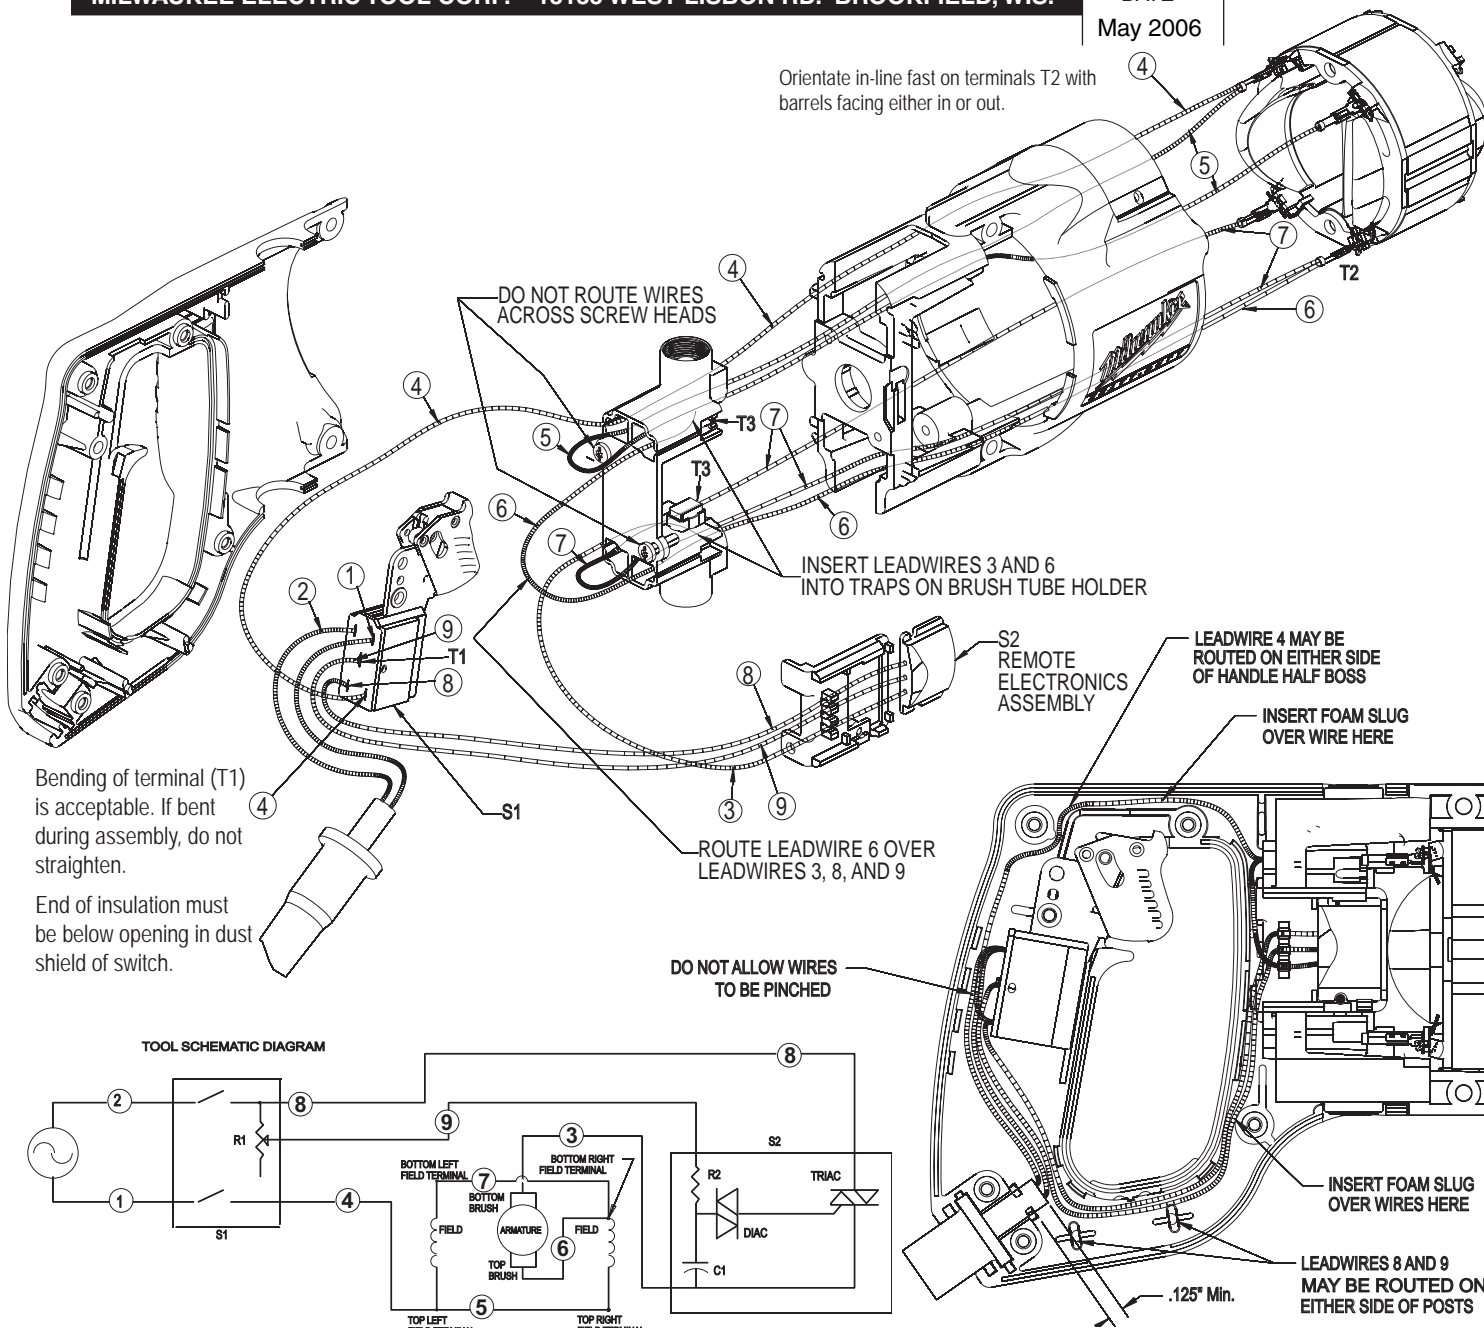

TOOL SCHEMATIC DIAGRAM

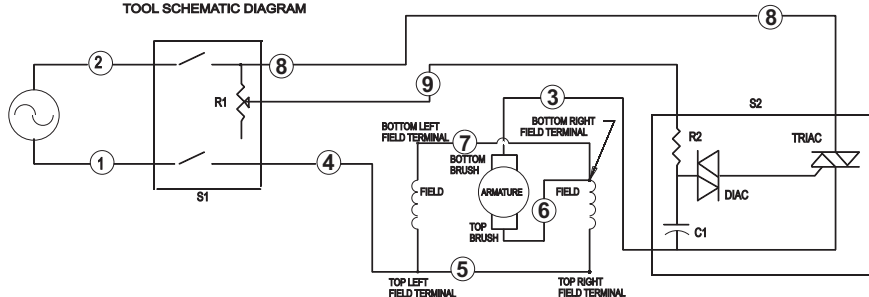

NOTE:

All leads must be held to $\pm 1/8"$.
All lead lengths are before stripping.

WIRING SPECIFICATIONS

Wire No.	Wire Color	Origin or Part No.	Ga.	Length	Terminals, Connectors and End Wire Preparation
1	White	Cord	16	3.75"	Strip .35" and tin.
2	Black	Cord	16	3.75"	Strip .35" and tin.
3	Black	Remote Elec. Assy S2	18	4.59"	Strip .25" for T3.
4	White	23-94-6111	18	8"	Strip .32" and tin/strip .15" for T2.
5	White	23-94-6111	18	4.125"	Strip .15" for T2/strip .15" for T2.
6	Red	23-94-6121	18	5.6"	Strip .25" for T3/strip .15" for T2.
7	Black	23-94-6121	18	4.125"	Strip .15" for T2/strip .15" for T2.
8	Black	Remote Elec. Assy S2	18	9.44"	Strip .32" and tin.
9	Black	Remote Elec. Assy S2	18	10.1"	Strip .18" for T1.

TERMINAL DESCRIPTION

	Part No.	Qty.
T1	23-74-0900	1
T2	23-74-1060	4
T3	23-74-0410	2

CONNECTOR DESCRIPTION

	Description	Qty.
S1	Trigger Switch	1
S2	Remote Electronic Assembly	1