

WIRING INSTRUCTIONS

TITLE

TWO SPEED BAND SAW


BULLETIN

58-01-0722


MILWAUKEE ELECTRIC TOOL CORP.

13135 WEST LISBON RD. BROOKFIELD, WIS.



DATE
Aug.'87

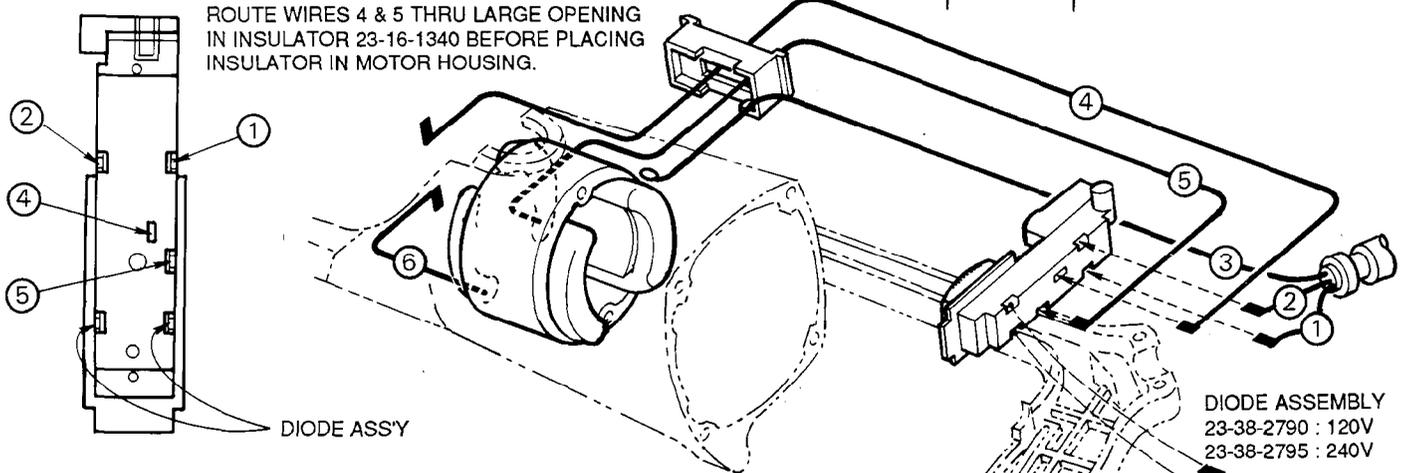

INSERT WIRE 4 INTO BRUSH HOLDER AND ROUTE AROUND WIRE RESTRAINT AS SHOWN.

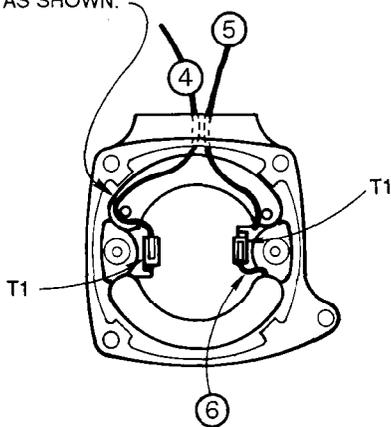

ROUTE SWITCH WIRES HERE BEFORE INSERTING CORD.

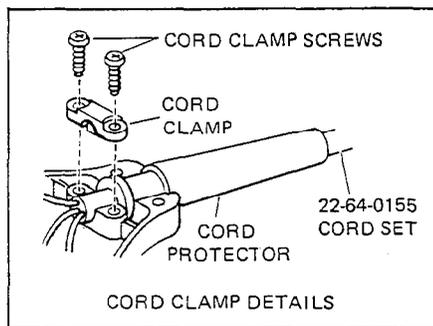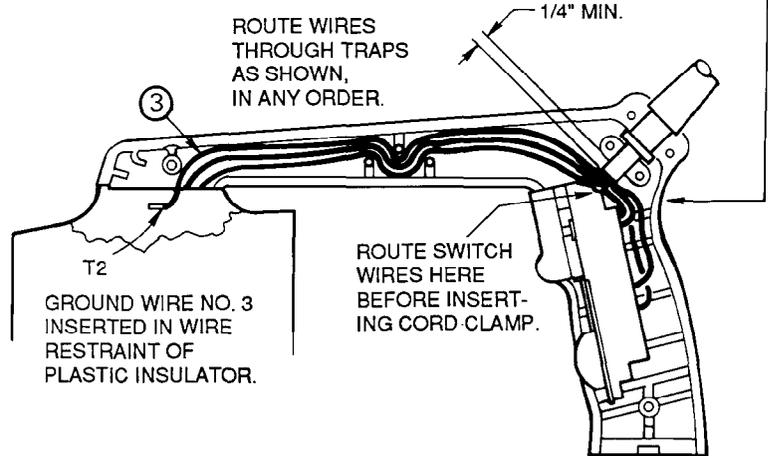

NOTE:

All leads must be held to + 1/8".
All field leads to be measured from and perpendicular to laminations.

WIRING SPECIFICATIONS

Wire No.	Wire Color	Origin or Gauge	Length	Terminals, Connectors and 1 or 2 End Wire Preparation
1	White	Cord	2-1/4"	Strip 1/4" For T1.
2	Black	Cord	2-1/4"	Strip 1/4" For T1.
3	Green	Cord	9-1/4"	Strip 3/16" For T2.
4	Red	18	15"	Strip 1/4" For T1 / Strip 1/4" For T1.
5	Yellow	Field	14-1/4"	Strip 1/4" For T1.
6	Black	Field	1-3/4"	Strip 1/4" For T1.

TERMINAL DESCRIPTION

Code	Part No.	Qty.
T1	22-44-0090	6
T2	23-74-0841	1

CONNECTOR DESCRIPTION

Code	Part No.	Qty.