




## SERVICE PARTS LIST

BULLETIN NO.  
PN0004160

| SPECIFY CATALOG NO. AND SERIAL NO. WHEN ORDERING PARTS |            | REVISED BULLETIN   | DATE      |
|--------------------------------------------------------|------------|--------------------|-----------|
| 7" Concrete Surface Grinding Dust Shroud               |            |                    | Nov. 2025 |
| CATALOG NO.                                            | 49-40-6220 | WIRING INSTRUCTION |           |
| SERIAL NO.                                             | R42A       |                    |           |

**EXAMPLE:**  
00 0 Component Parts (Small #)  
Are Included When Ordering  
The Assembly (Large #).

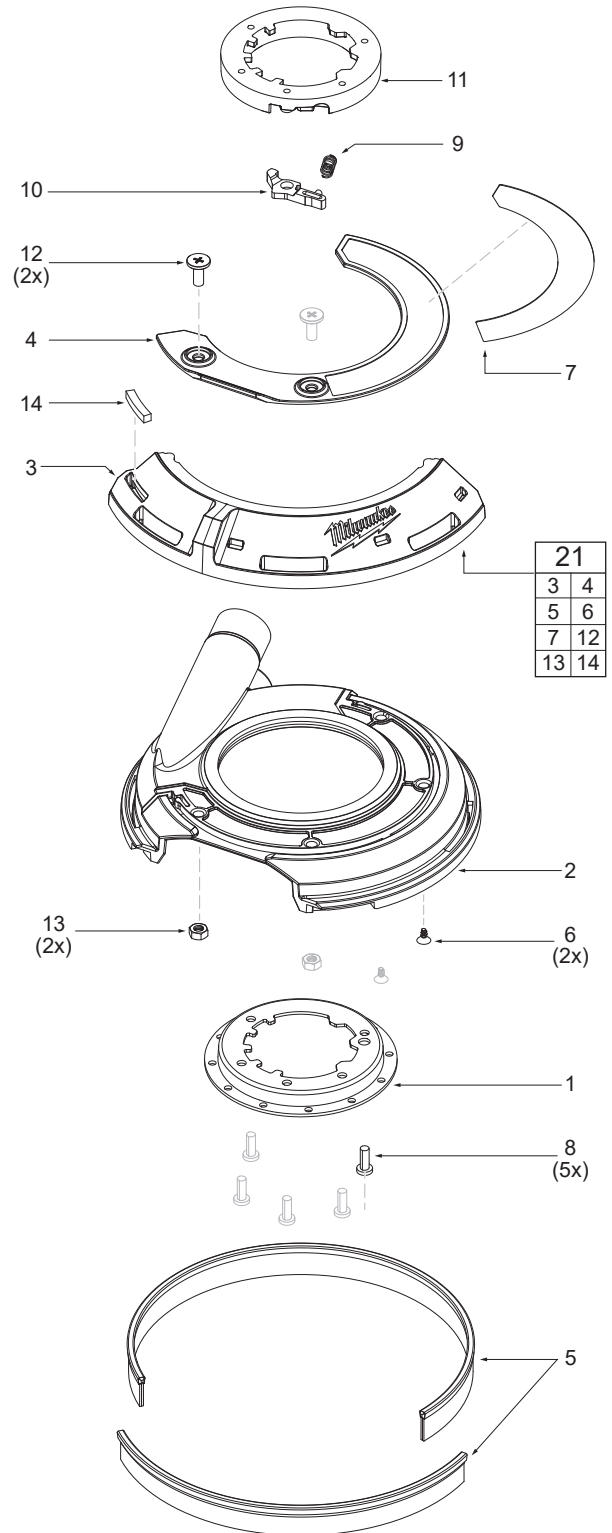

| FIG. | PART NO.   | DESCRIPTION OF PART       | NO. REQ. |
|------|------------|---------------------------|----------|
| 1    | -----      | Bracket                   | (1)      |
| 2    | -----      | Shroud Body               | (1)      |
| 3    | -----      | Sliding Cover             | (1)      |
| 4    | -----      | Retaining Ring            | (1)      |
| 5    | -----      | Brush Set                 | (1)      |
| 6    | -----      | M4 x 8mm Flat Head Screw  | (2)      |
| 7    | 12-20-9120 | Service Nameplate         | (1)      |
| 8    | -----      | 10-24 Plastite T-25 Screw | (5)      |
| 9    | -----      | Lever Spring              | (1)      |
| 10   | -----      | Lever                     | (1)      |
| 11   | -----      | Collar                    | (1)      |
| 12   | -----      | M6 x 15mm Screw           | (2)      |
| 13   | -----      | M6 Hex Nut                | (2)      |
| 14   | -----      | EVA Foam Plug             | (1)      |
| 21   | 31-15-0504 | 7" Sliding Cover Assembly | (1)      |
| 22   | 14-46-0063 | Washer Kit (Not Shown)    | (1)      |

**FIG. 7 SERVICE NOTES**  
A clean, dry surface is essential for proper performance for any adhesive system. The area intended for application of any adhesive label or nameplate must be prepared by cleaning with isopropyl alcohol. The solvent is to be applied with a clean, lint free applicator and the surface allowed to dry before applying the label or nameplate.