

# WIRING INSTRUCTIONS

**TITLE**

**"D"-HANDLE TOOLS**

**BULLETIN**


**58-01-0178**

MILWAUKEE ELECTRIC TOOL CORP.

13135 WEST LISBON RD BROOKFIELD WIS

DATE  
Aug. '75

\* ON SOME TOOLS FIELD WIRE NO. 4 IS RED, AND NO. 6 IS BROWN

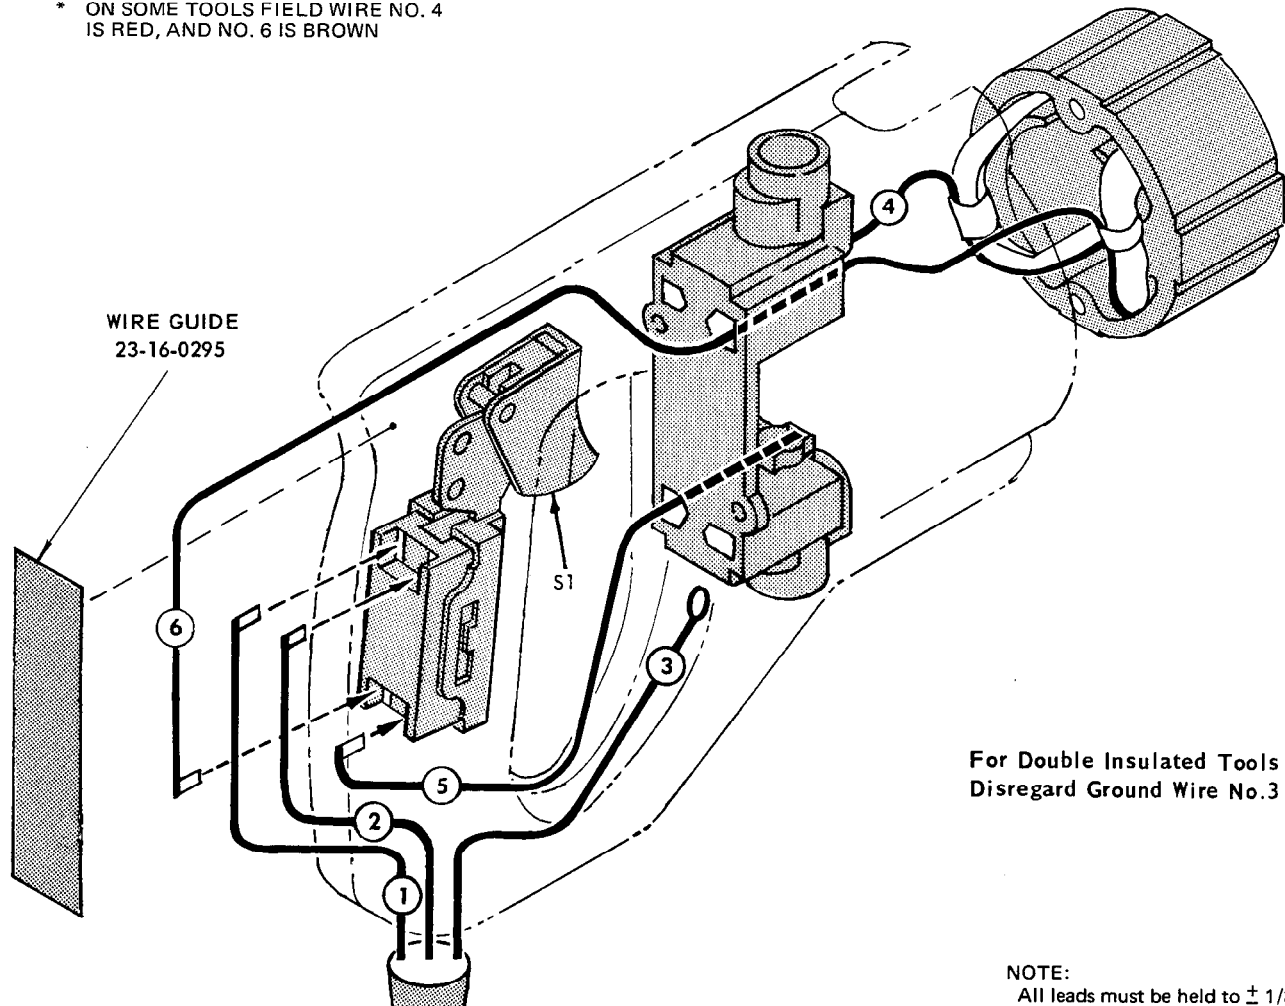

Refer to electrical parts chart for terminal and connector part nos. and quantity required – see drawing for actual hook-up.

**NOTE:**

All leads must be held to  $\pm 1/8"$ .  
All field leads to be measured from and perpendicular to laminations.  
All lead lengths are before stripping.

### WIRING SPECIFICATIONS

Wire No.	Wire Color	Origin or Gauge	Length	Terminal				Connector				
				T1	T2	T3	T4	C1	C2	C3	C4	
1	BLACK	CORD	3-7/8	X								
2	WHITE	CORD	3-7/8	X								
3	GREEN	CORD	4-1/2		X							
4	WHITE*	FIELD	2-1/4	X								
5	WHITE	18	7-3/4	XX								
6	WHITE*	FIELD	10-1/4	X								

### ELECTRICAL PARTS

#### TERMINAL DESCRIPTION

Code	Part No.	Qty.
T1	22-44-0090	6
T2	23-74-0390	1

#### CONNECTOR DESCRIPTION

Code	Part No.	Qty.

#### SWITCH DESCRIPTION

Code	Part No.	Qty.
S1	23-66-0505	1